




## MAXICAR Art. 115

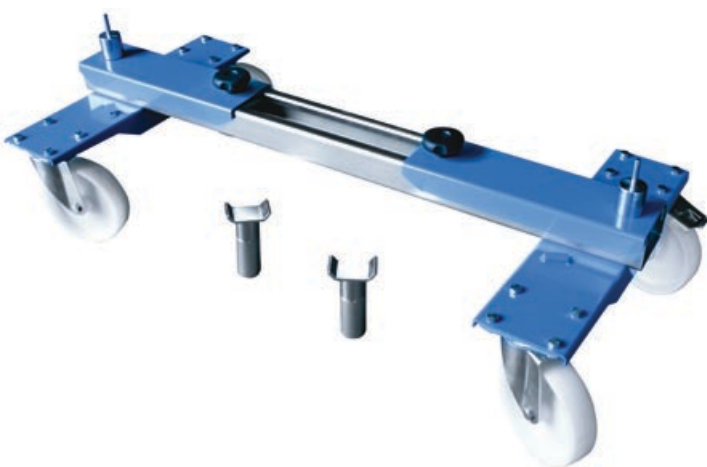

Pratico carrello per la movimentazione di scocche e di vetture danneggiate (senza ruote).  
Bracci telescopici regolabili. Le ruote pivotanti di grande diametro (20 cm), di cui una munita di freno, sono resistenti alle temperature dei forni di verniciatura.

Il MAXICAR può essere dotato di 3 diversi tipi di attacchi:

- a perno (standard)
- a "U" (standard)
- a morsa (rif. 103 optional)

*MAXICAR is practical trolley for transportation of car bodies and damaged motor vehicles around body shops and mechanical shops. Its telescopic arms can be adjusted in different positions, to allow the loading of motor cars with different sizes. The large diameter wheels (20 cm), one of which is equipped with a brake, offer great stability and are heat resistant.*

*MAXICAR features 3 different vehicle supports:*

- pins (standard)
- U-plates (standard)
- clamps (ref. 103, optional)


### Dotazione standard | Standard equipment

- Carrello con bracci telescopici
- 2 prolunghie filettate
- 2 attacchi con perni
- 2 attacchi con piattello a U
- Trolley with telescopic arms
- 2 threaded extension tubes
- 2 threaded pin adaptors
- 2 threaded adaptors with U plate

Caratteristiche tecniche Technical specifications		115
Max. Larghezza, Max. width	mm	1800
Min. Larghezza, Min. width	mm	1300
Max interasse fra attacchi, Max support distance	mm	1740
Min. interasse fra gli attacchi, Min distance between brackets	mm	810
Interasse fra le ruote, Wheelbase between castors	mm	1100
Altezza Max. con morsetti + prolunga, Max. height with clamp + extension	mm	560
Ruota con freno, Wheel with brake		1
Portata max, Max loading	Kg	1500
Peso, Weight	Kg	42



## MAXICAR Art. 115 + Art. 103

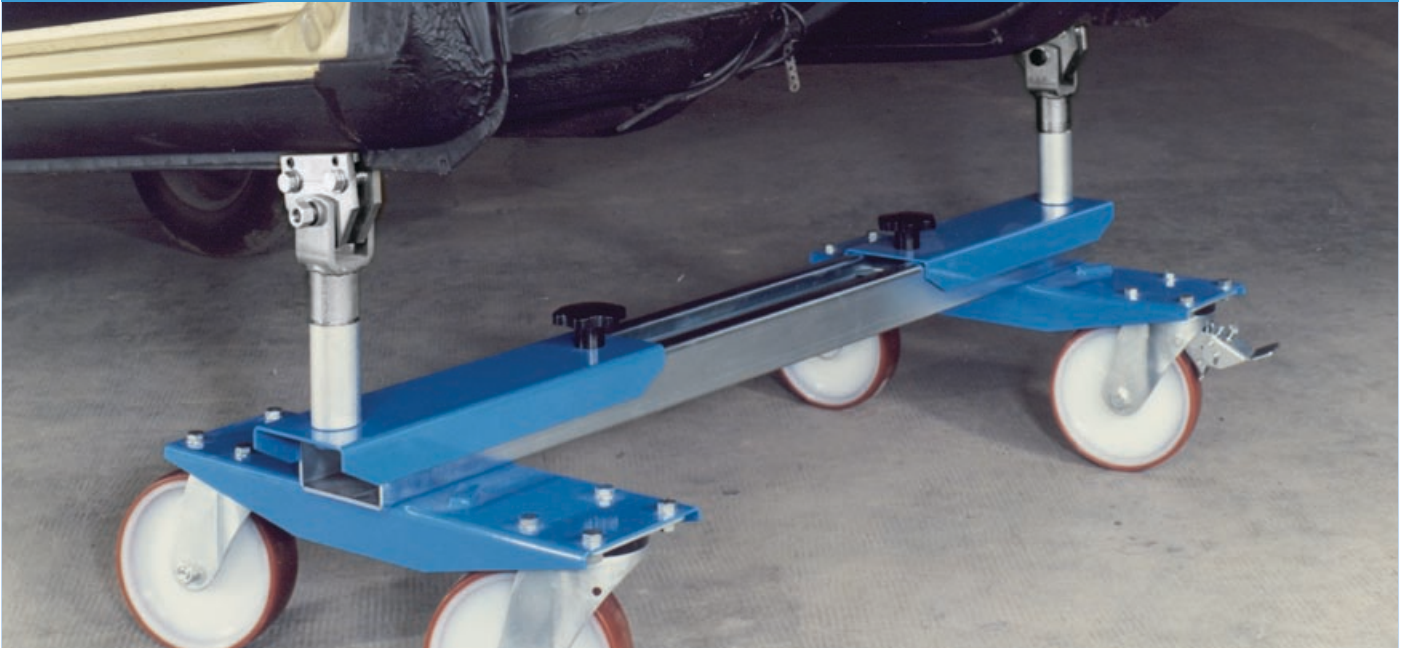

L'utilizzo dei morsetti per bordino sottoporta, art. 103, unitamente al Maxicar è consigliabile quando si devono movimentare veicoli di grandi dimensioni su pavimenti sconnessi, ove sia richiesta maggiore sicurezza di ancoraggio, per evitare la caduta del veicolo dal carrello.

Art. 103 Push Pull è un optional non compreso nella fornitura del Maxicar e deve essere ordinato separatamente, se richiesto.


*The use of the sill clamps Ref 103 together with the Maxicar is strongly recommended, when large size vehicles are to be transported on uneven floors, whenever a safer anchoring of the car shell is necessary, to prevent its falling down from the trolley.*

*The Ref 103 Push Pull is an optional not included in the standard delivery of Maxicar and should be ordered separately, if requested.*

### Accessori | Accessories



Art. 103 Push pull  
Set di 2 pezzi di morse con attacco filettato per bordino sotto porta.  
Set with 2 pcs clamps with threaded connection for sill anchoring



### Prodotti correlati | Related products



Art. 116 | SUV TROLLEY



Art. 117 | SVELTO